


G

LIGHT ELECTRONICS CO., LTD.

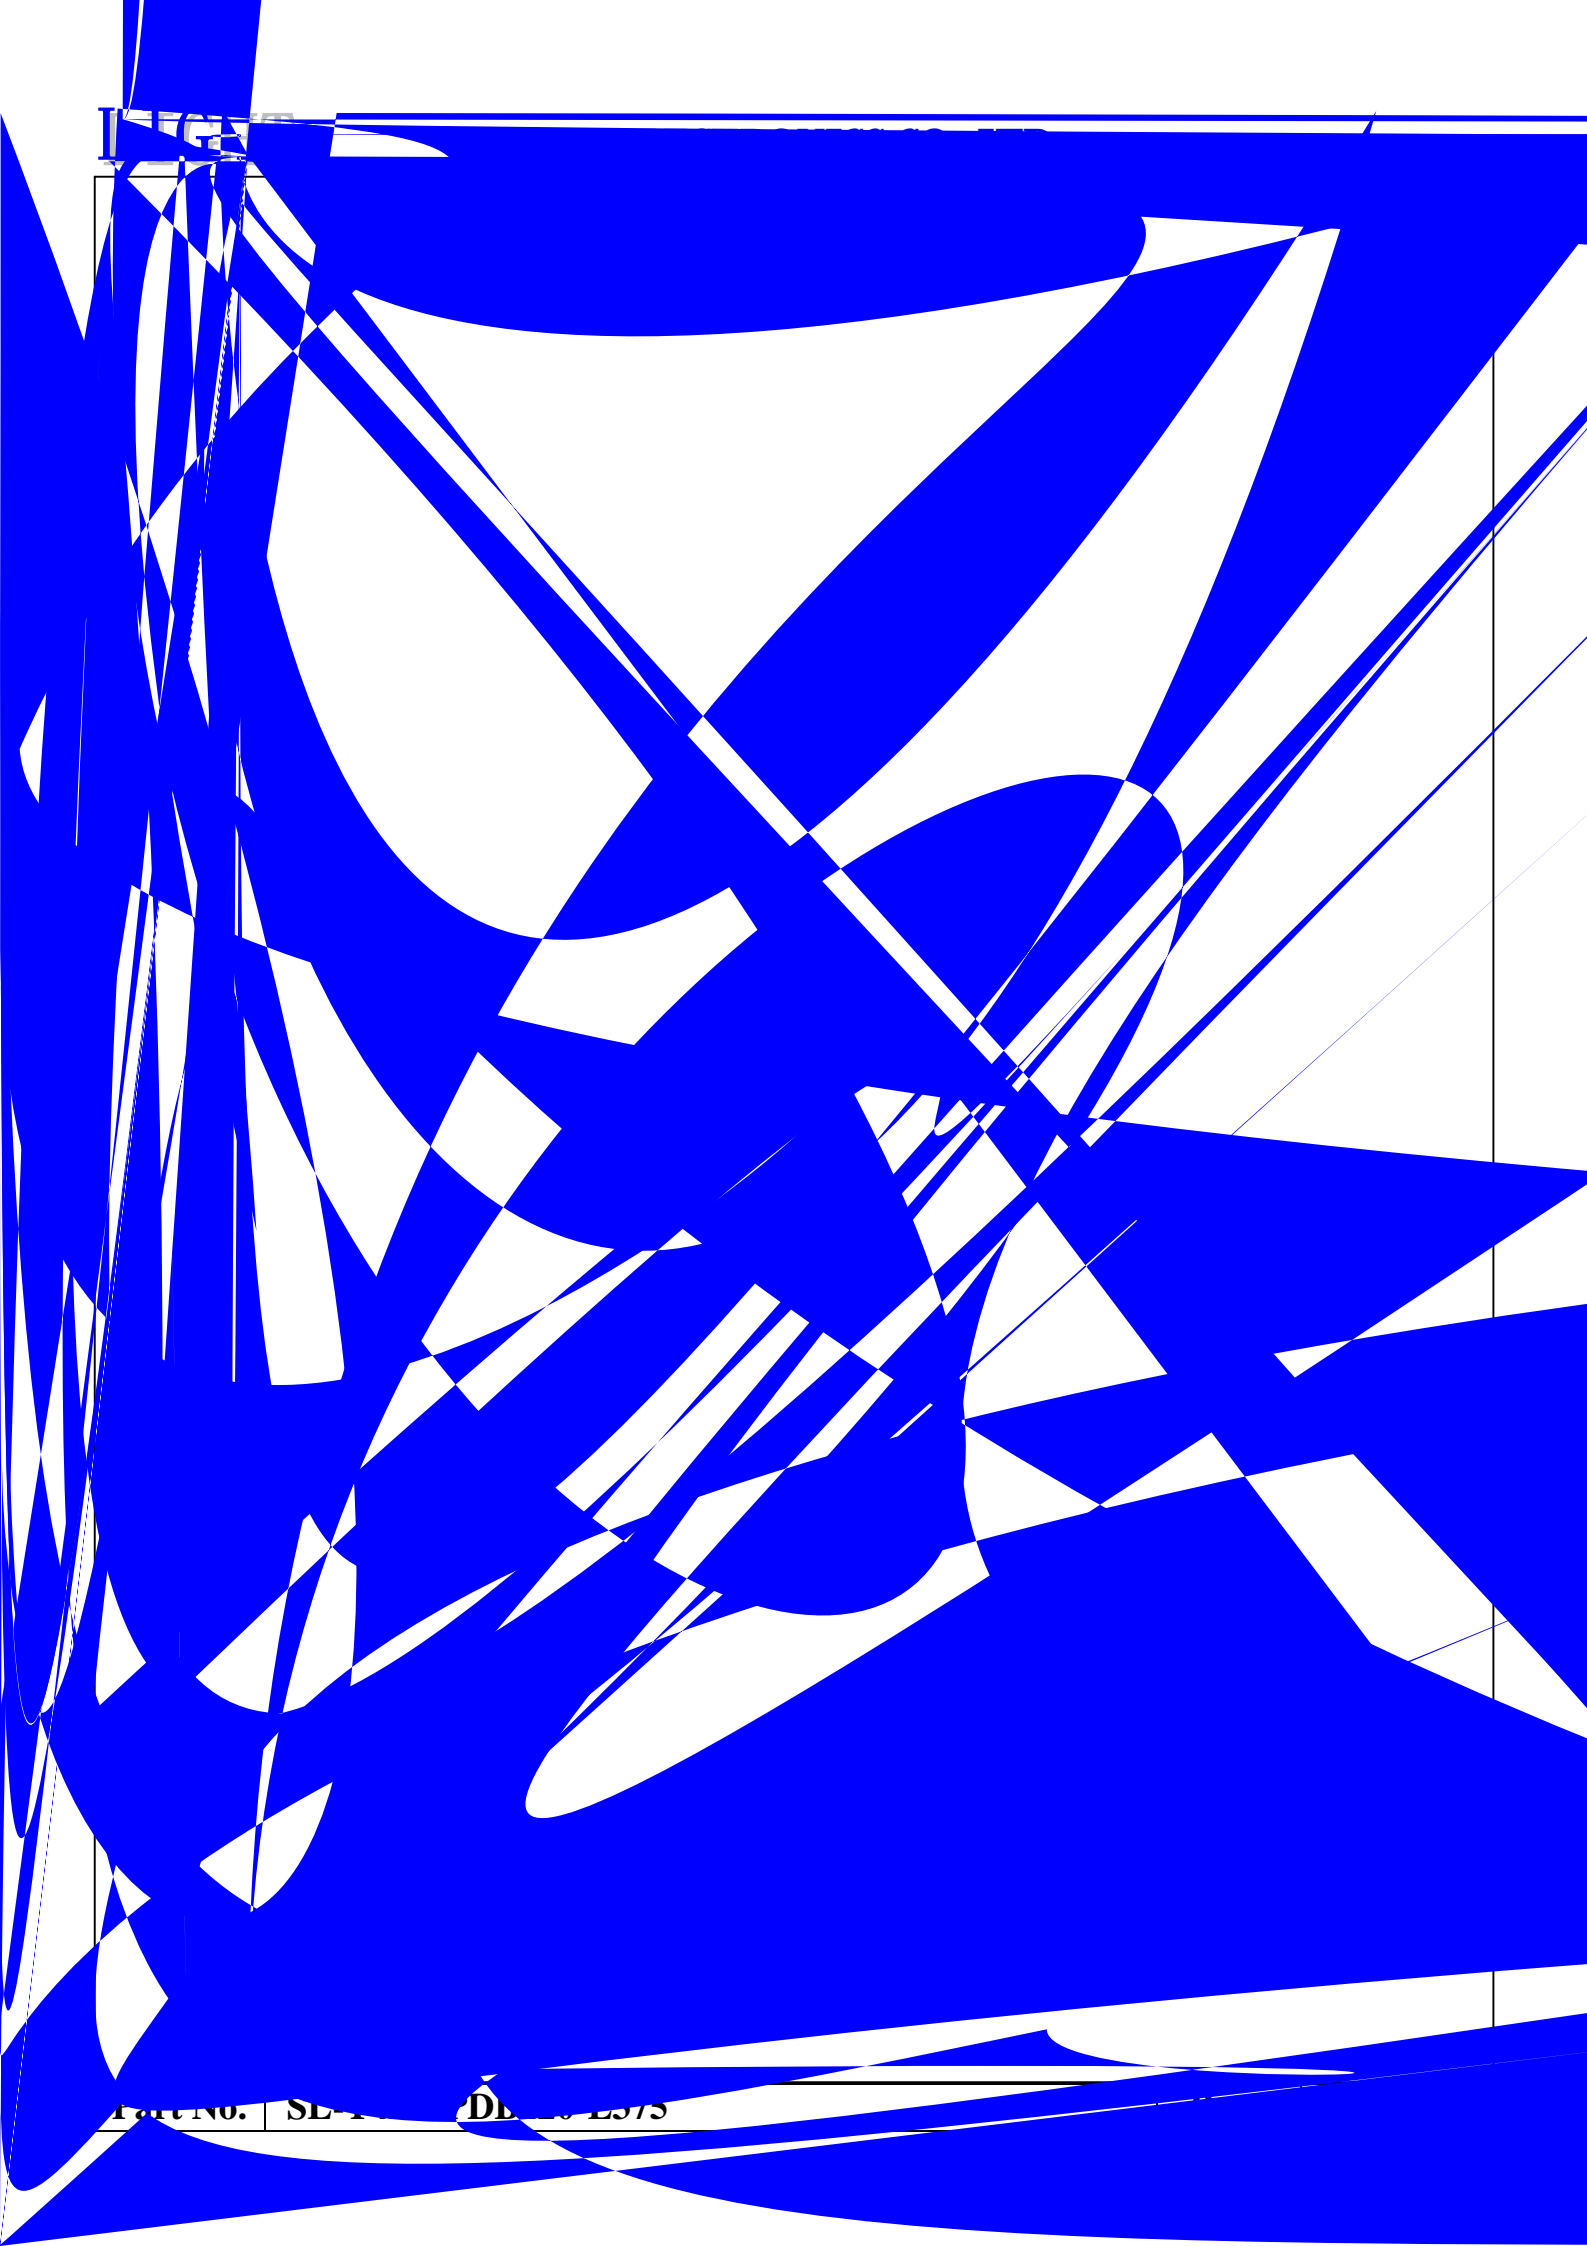

Infrared Photo Diode Specification

Commodity: Infrared Photo diode


Reverse Light Current Bin Limits

BIN CODE	Min.(μ A)	Max.(μ A)
1	26	31
2	31	37
3	37	44
4	44	53

NOTE: The I_L guarantee should be added $\pm 15\%$ tolerance.

Label Explanation

LIGHT Universal Label

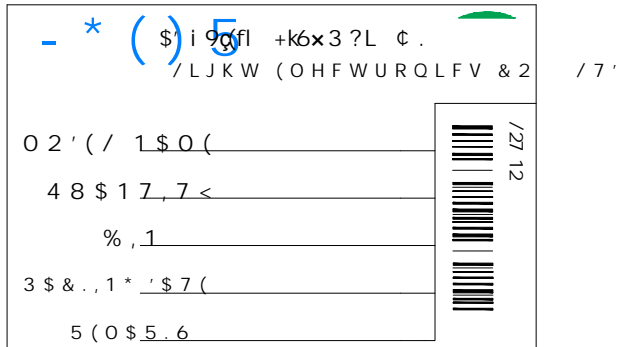- * () 5	\$) i 9gfl +k6x3 ?L ¢ .	
	/LJKW (OHFWURQLFV & 2	/ 7 ' .
0 2 ' (/ 1 \$. 0 ( / 21 12
4 8 \$ 1 7 , 7 <		
% , 1		
3 \$ & . , 1 * ' \$ 7 (
5 (0 \$ 5 . 6		

Customer Defined Label



Ÿ ÷ ` -
 f H
 1 4Ÿ
 ; > ß U
 Ø m ~ -



Carrier Tape Specifications (Loaded Quantity: 2200pcs/reel)

Note: Tolerance unless mentioned is $\pm 0.1\text{mm}$; Unit = mm

Moisture Resistant Packaging

