











Suggest IR Reflow Condition For Lead Free:


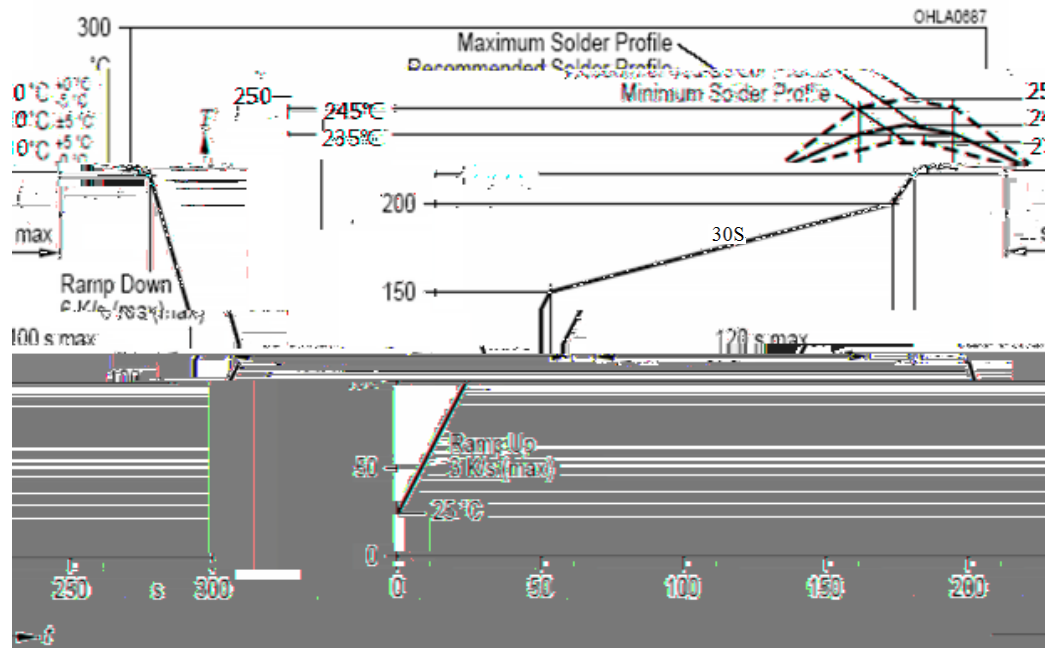


Typical Electrical / Optical Characteristics Curves (25°C Ambient Temperature Unless Otherwise Noted)

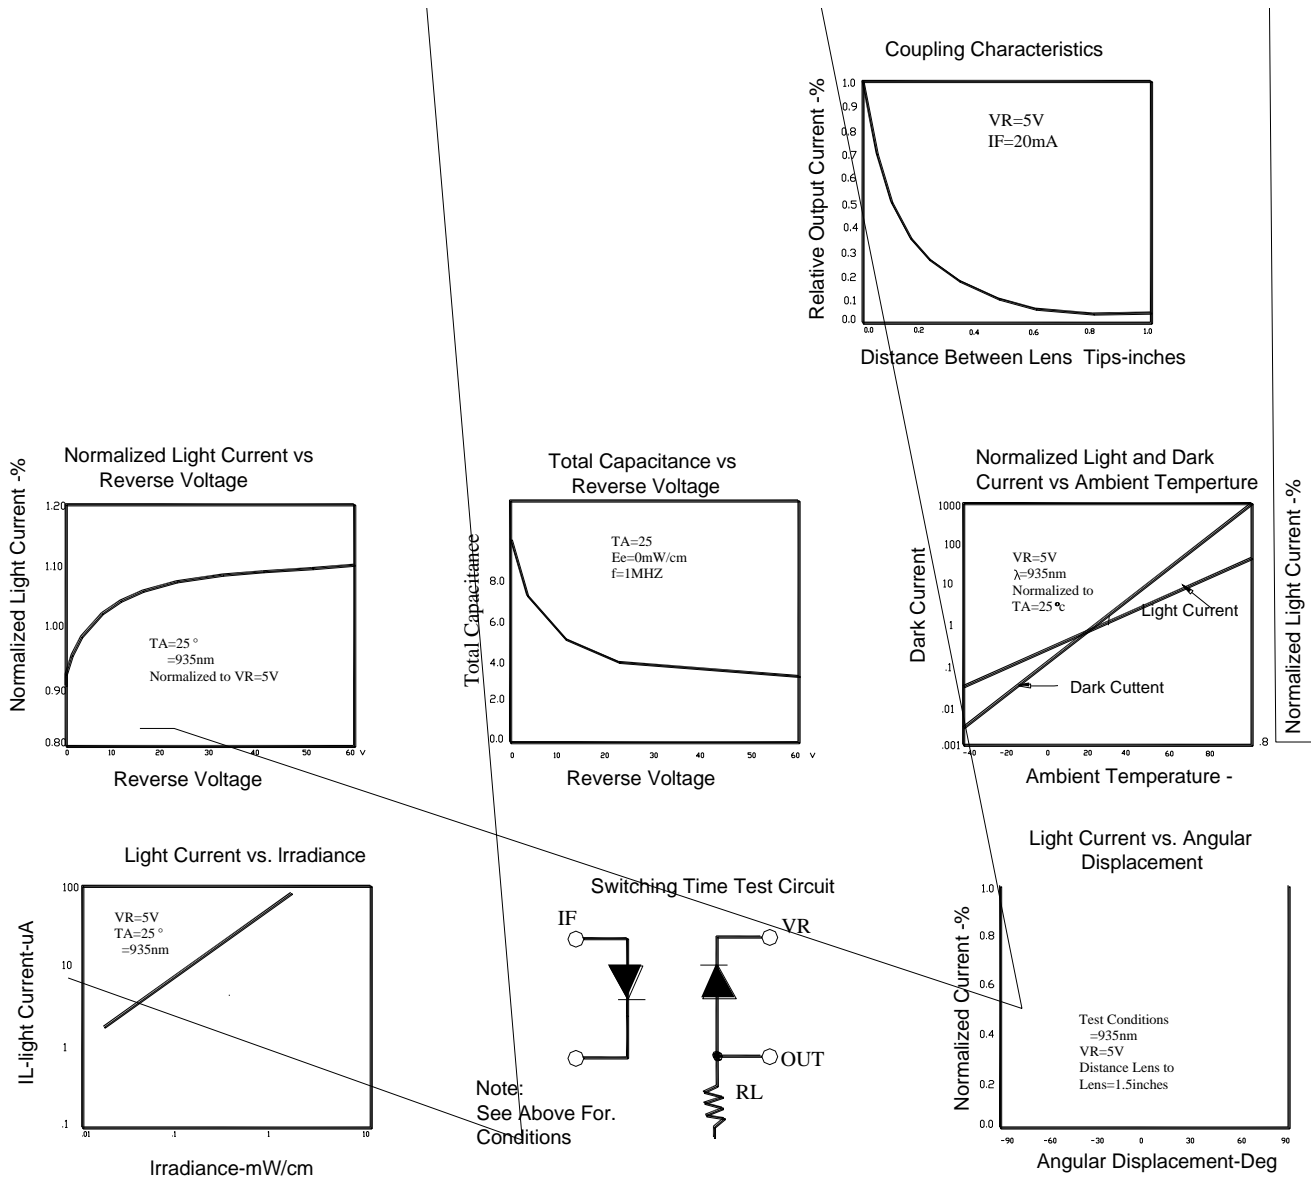

Package

Package Dimensions

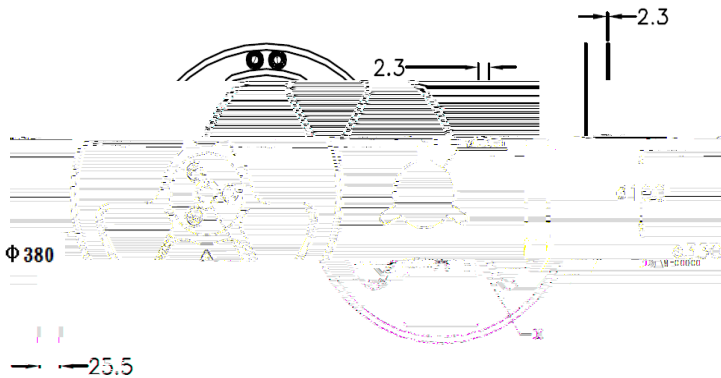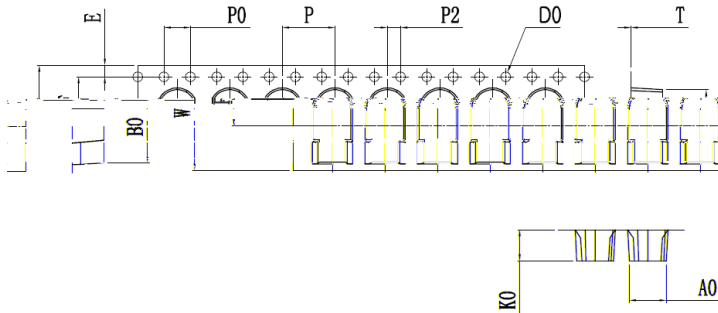


| Item | Specification | |
|-------|---------------|---------|
| | Minum | Maximum |
| W | 15.97 | 16.3 |
| P | 7.9 | 8.1 |
| E | 1.65 | 1.85 |
| F | 7.4 | 7.6 |
| D | 1.5 | 1.6 |
| P0 | 3.9 | 4.1 |
| P0x10 | 39.8 | 40.2 |
| P2 | 1.9 | 2.1 |
| A0 | 5.2 | 5.4 |
| BO | 10.6 | 10.8 |
| KO | 4.8 | 5.0 |

Notes:

- 1.All dimensions in millimeters.
- 2.All dimensions meet EIA-481-C requirements.
- 3.Cover tape by a heat sealing manner.

LIGH



| | | | |
|-----------------|------------------------------|-------------|---------------|
| Part No. | LG-05PD4D94K-003B-B-T | Page | 8 of 8 |
|-----------------|------------------------------|-------------|---------------|