



Features

Package Dimension

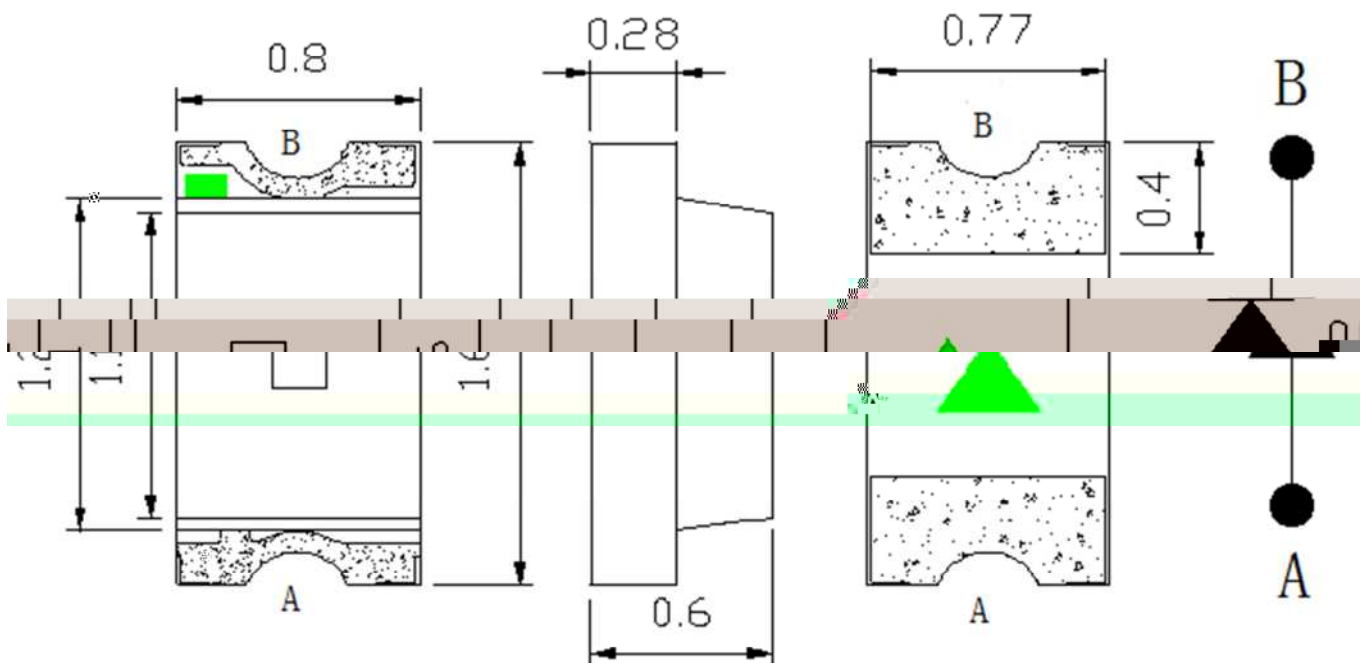


| | | |
|--|--|--|
| | | |
| | | |


Notes:

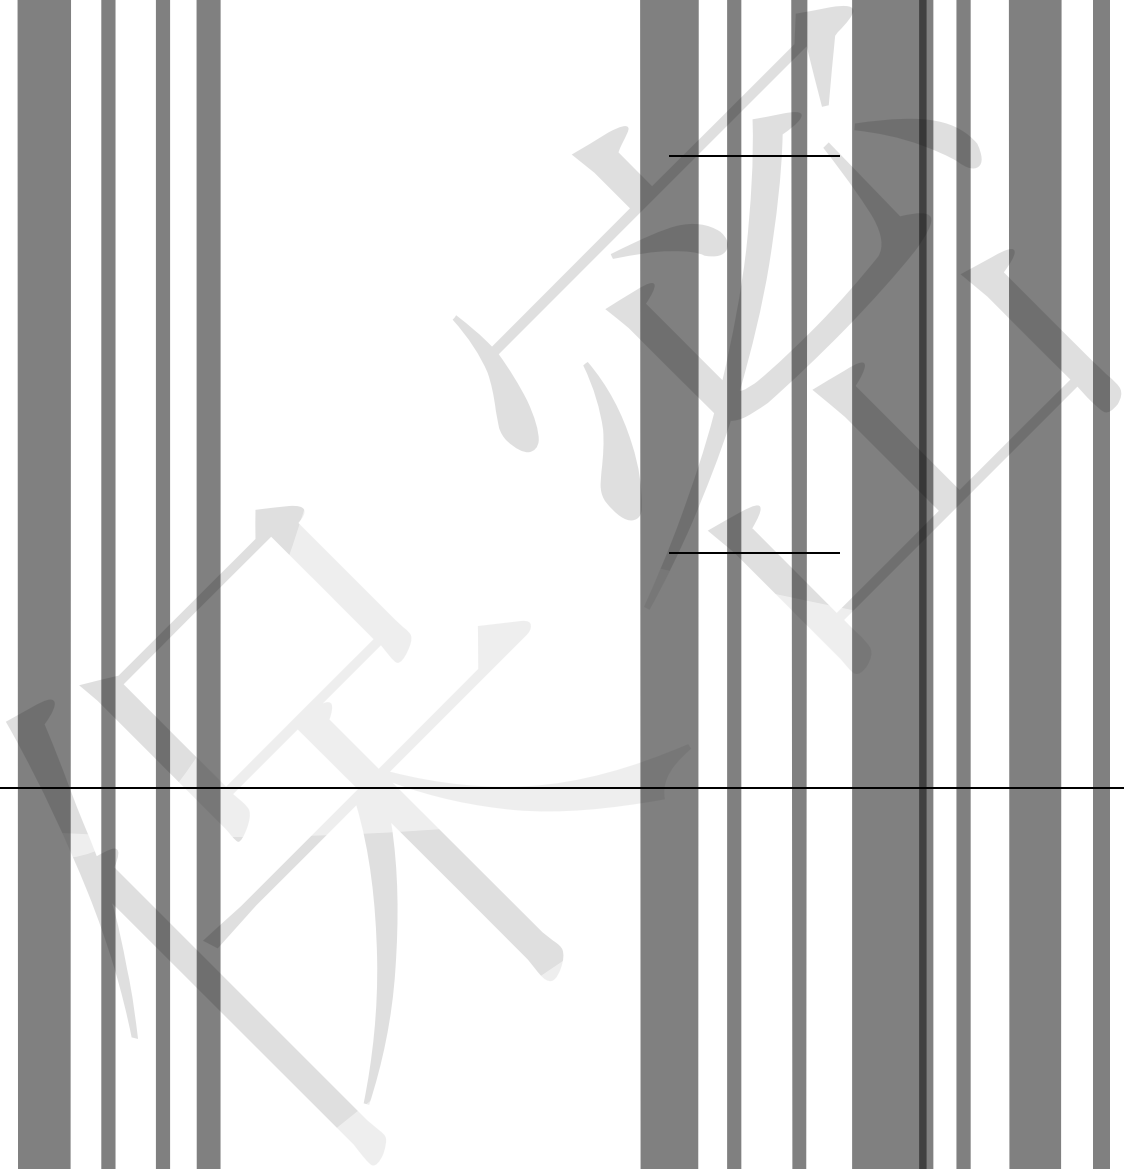


,um331



Typical Electrical / Optical Characteristics Curves (25 Ambient Temperature Unless Otherwise Noted)

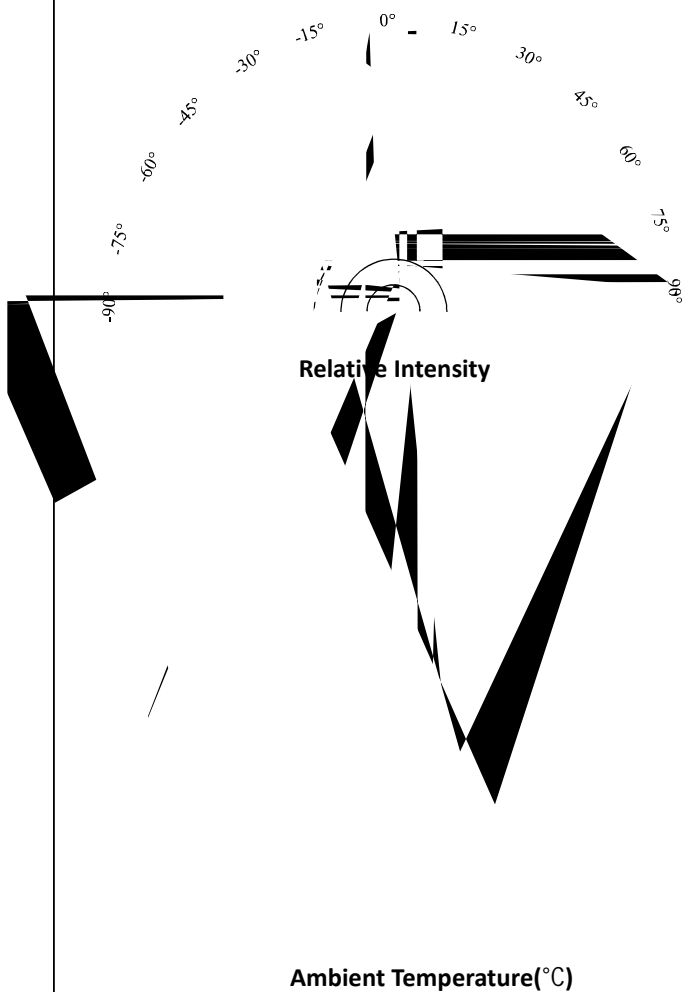


Chromaticity Coordinates (Ta=25°C, IF=20mA)

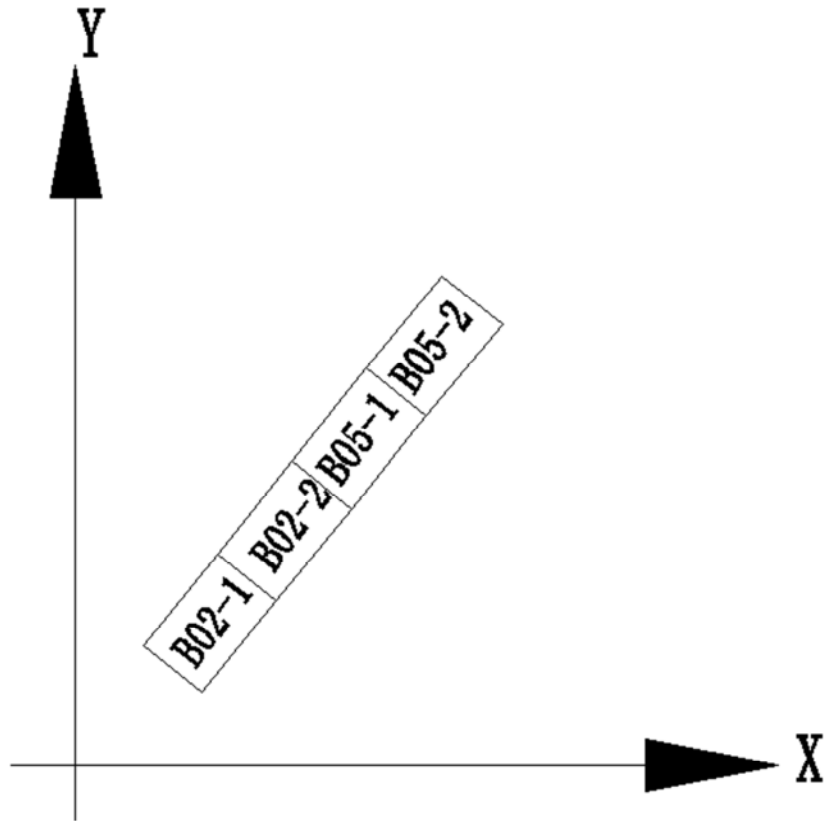


| 色区 色区 | X1 | Y1 | X2 坐标 | Y2 | X3 | Y3 | X4 | Y4 |
|----------|--------|--------|----------|--------|--------|--------|--------|--------|
| B02-1 | 0.2716 | 0.2542 | 0.2672 | 0.2564 | 0.2713 | 0.2650 | 0.2759 | 0.2628 |
| B02-2 | 0.2759 | 0.2628 | 0.2713 | 0.2650 | 0.2753 | 0.2732 | 0.2800 | 0.2710 |
| B05-1 | 0.2800 | 0.2710 | 0.2753 | 0.2732 | 0.2793 | 0.2847 | 0.2843 | 0.2790 |
| B05-2 | 0.2840 | 0.2792 | 0.2793 | 0.2815 | 0.2832 | 0.2898 | 0.2881 | 0.2874 |


Carrier Tape Specifications (Loaded Quantity: 4000pcs/reel)

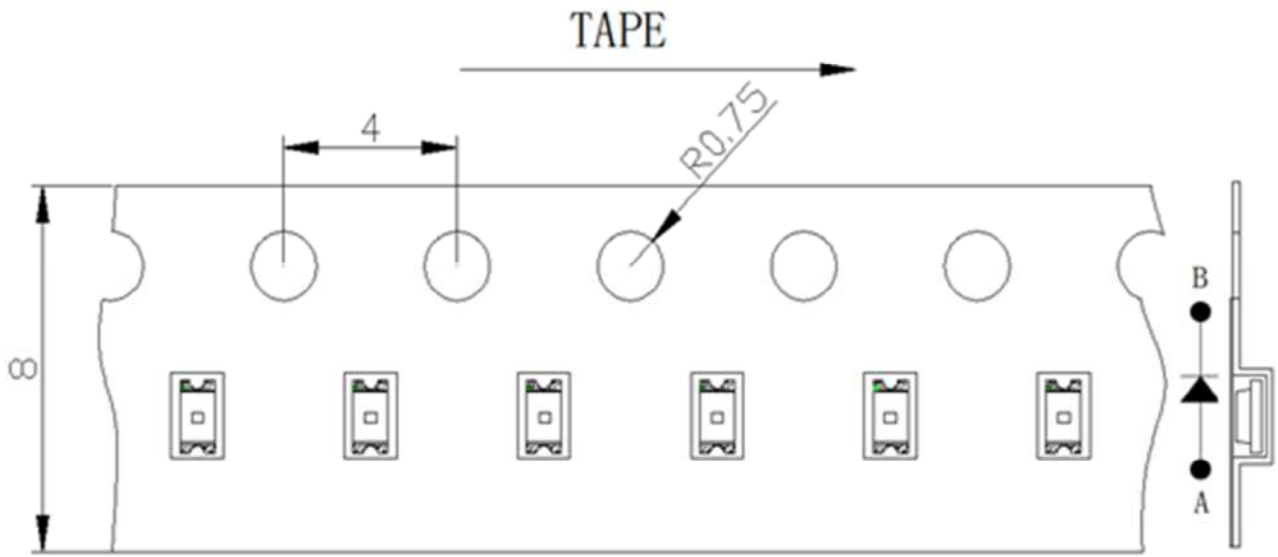

Moisture Resistant Packaging

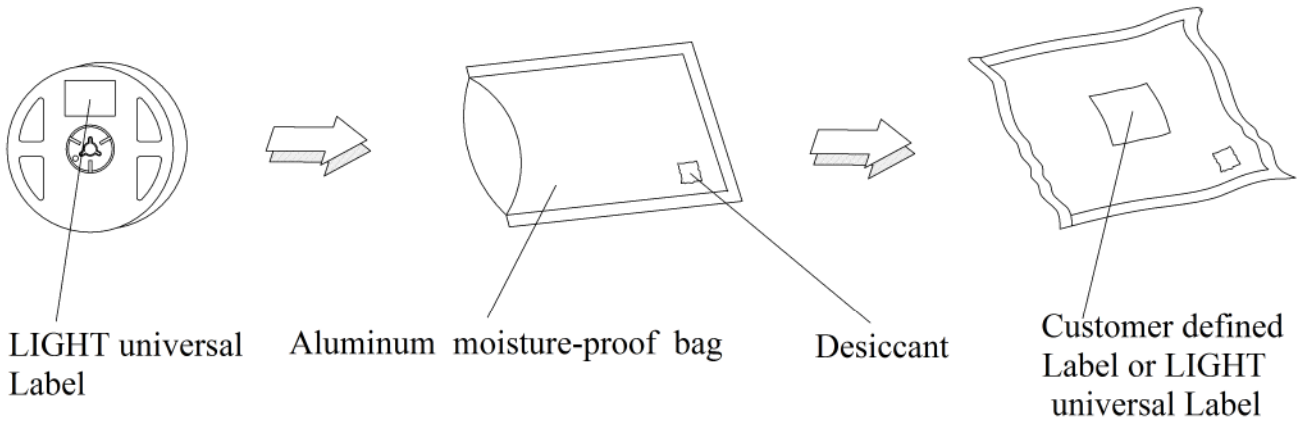

Suggest IR Reflow C

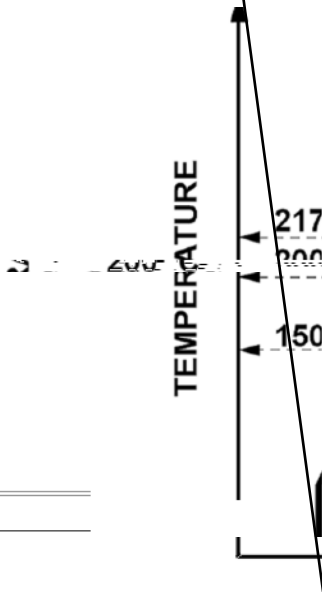

1. Reflow soldering sho
2. When soldering, do n


Soldering iron

1. When hand soldering
2. The hand solder shou

Repairing

Repair should not be do double-head soldering i whether the characterist

r Lead Free

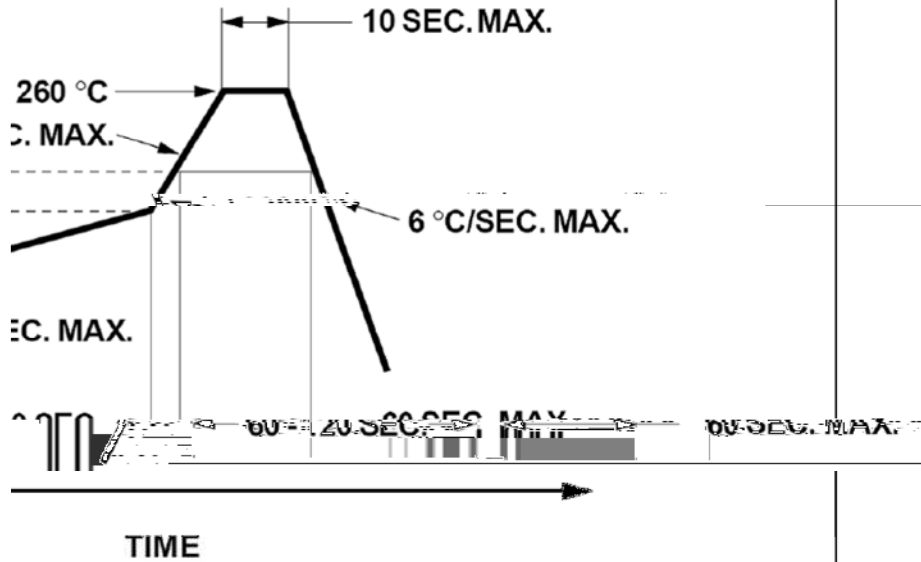

more than two times. the LEDs during heating.

e of the iron must less than 300°C for 3 seconds. once.

ds have been soldered. When repairing is unavoidable, a ed (as below figure). It should be confirmed beforehand l or will not be damaged by repairing.