


Features

Package Dimension




Notes:

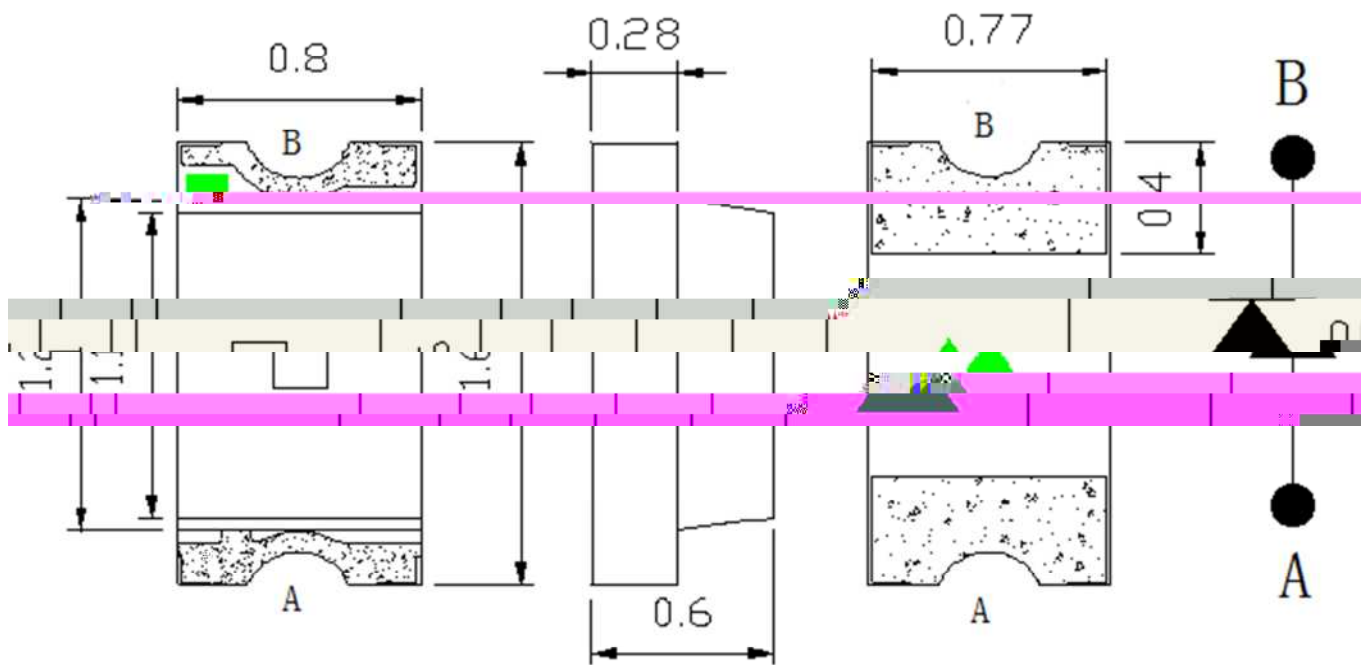


Typical Electrical / Optical Characteristics Curves (25 Ambient Temperature Unless Otherwise Noted)

--	--

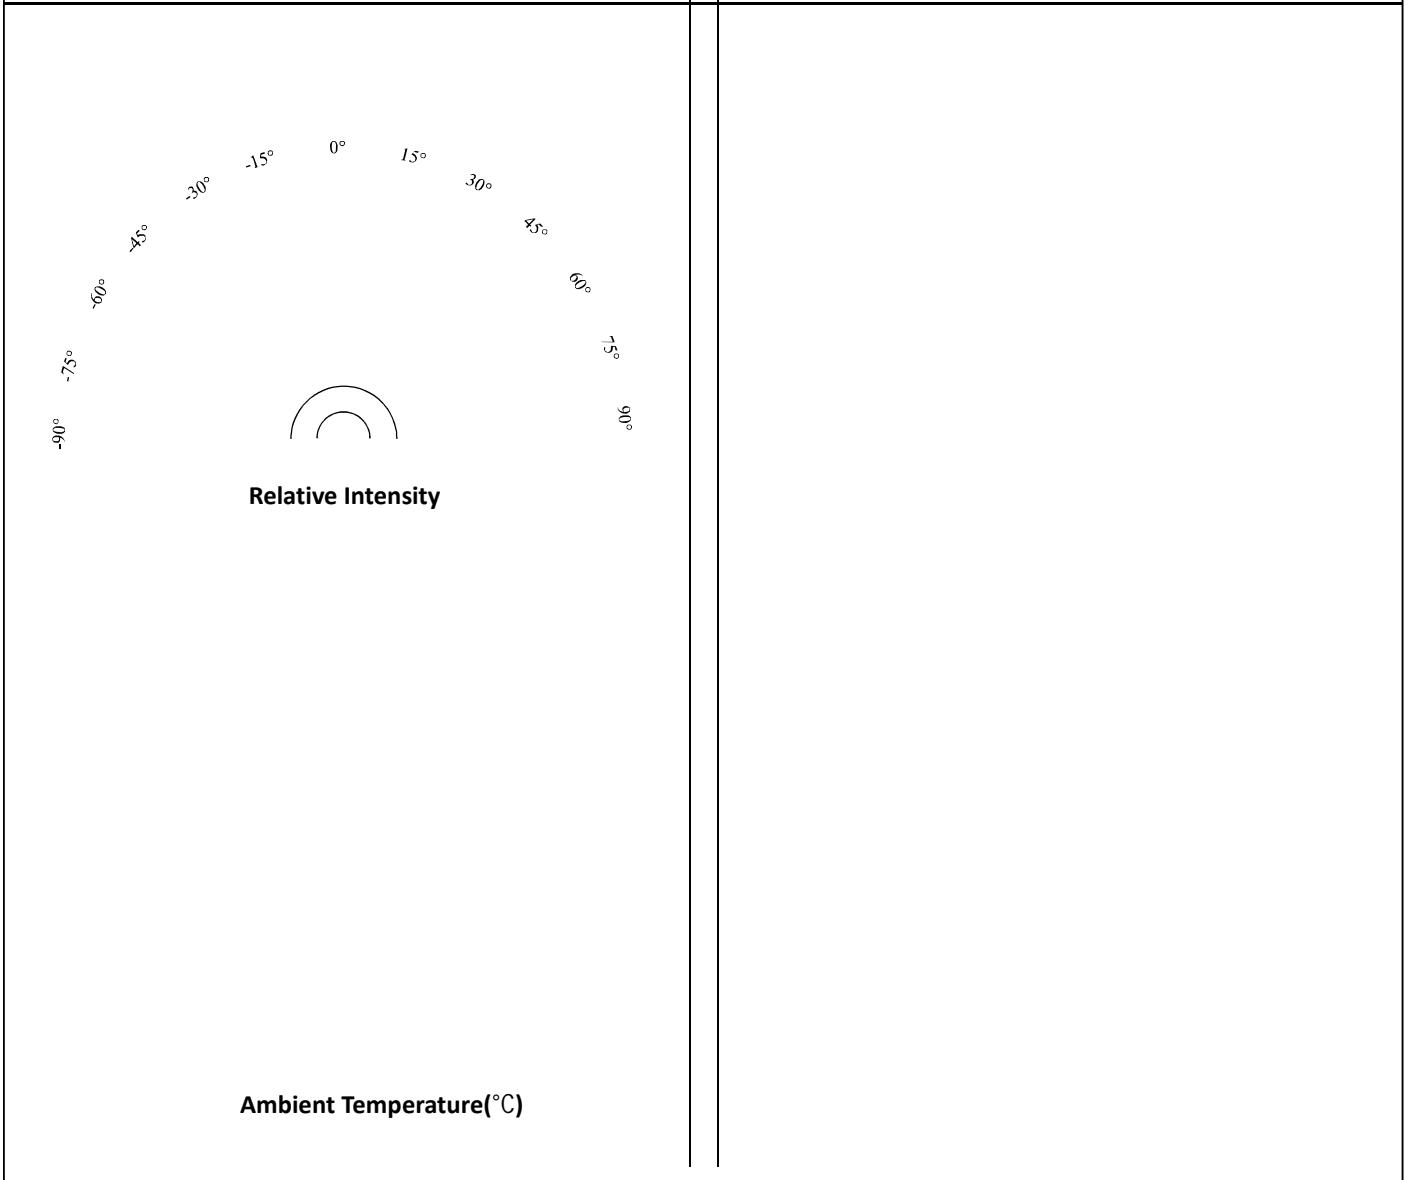


Chromaticity Coordinates (Ta=25°C, IF=20mA)

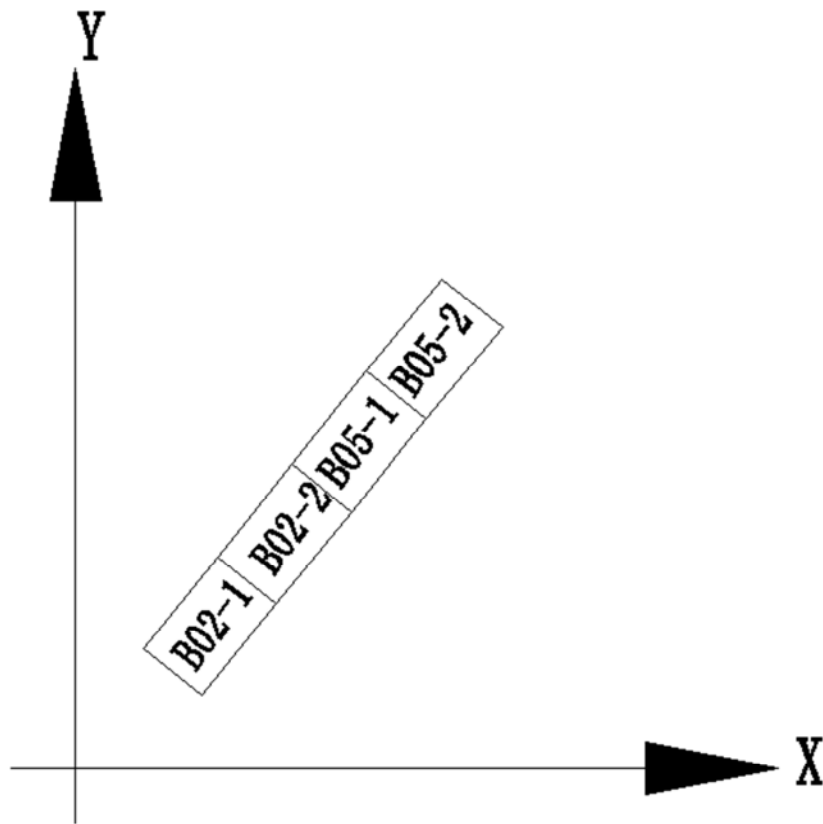


色区 坐标	X1	Y1	X2	Y2	X3	Y3	X4	Y4
B02-1	0.2716	0.2542	0.2672	0.2564	0.2713	0.2650	0.2759	0.2628
B02-2	0.2759	0.2628	0.2713	0.2650	0.2753	0.2732	0.2800	0.2710
B05-1	0.2800	0.2710	0.2753	0.2732	0.2793	0.2815	0.2819	0.2792
B05-2	0.2840	0.2792	0.2793	0.2815	0.2832	0.2898	0.2881	0.2874


Carrier Tape Specifications (Loaded Quantity: 4000pcs/reel)

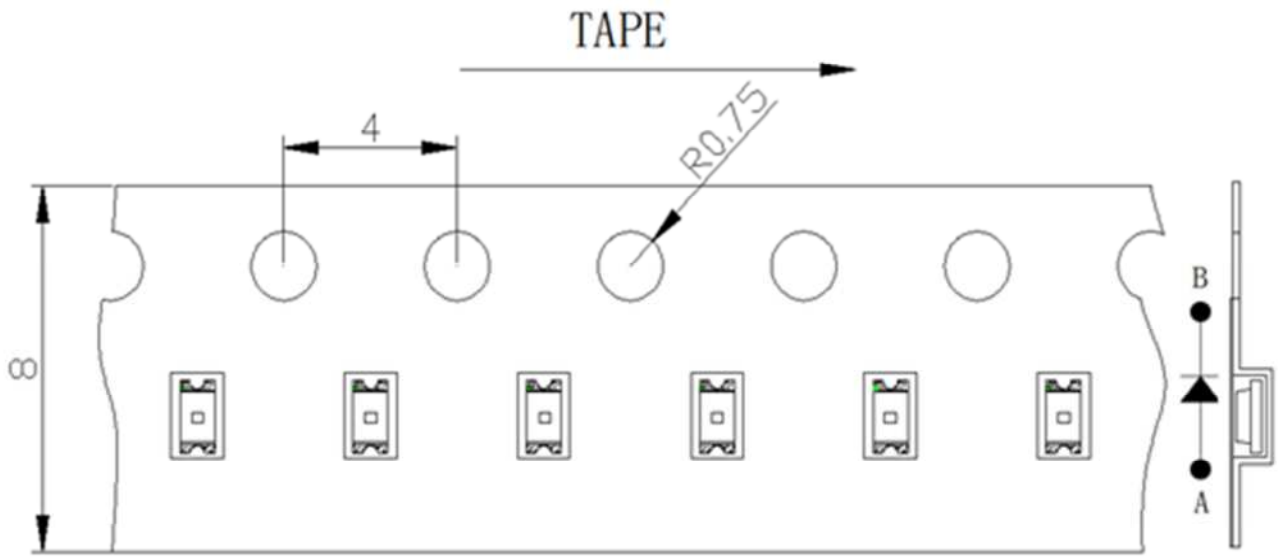

Moisture Resistant Packaging

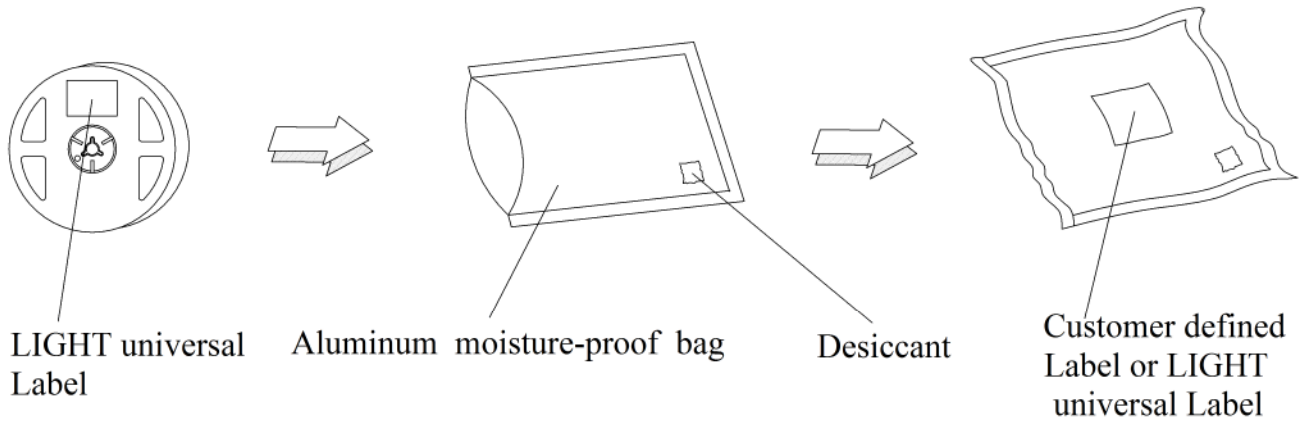

Suggest IR Reflow Condition For Lead Free

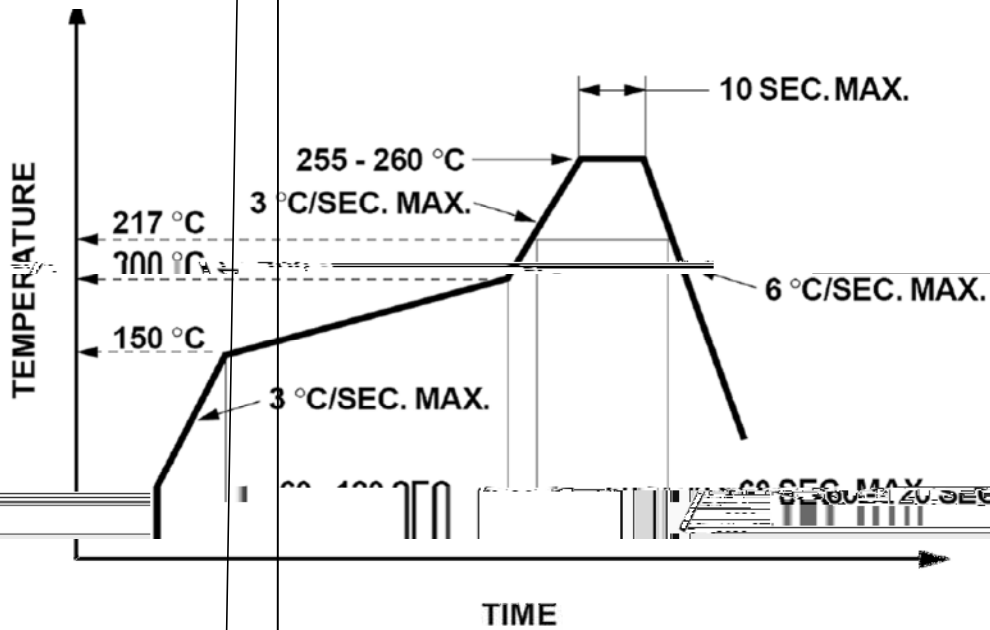

1. Reflow soldering should not be done more than two times.
2. When soldering, do not put stress on the LEDs during heating.

Soldering iron

1. When hand soldering, the temperature of the iron must less than 300°C for 3 seconds.
2. The hand solder should be done only once.

Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of LEDs will or will not be damaged by repairing.

